


Sun Shading // BLADER

VERTIGO



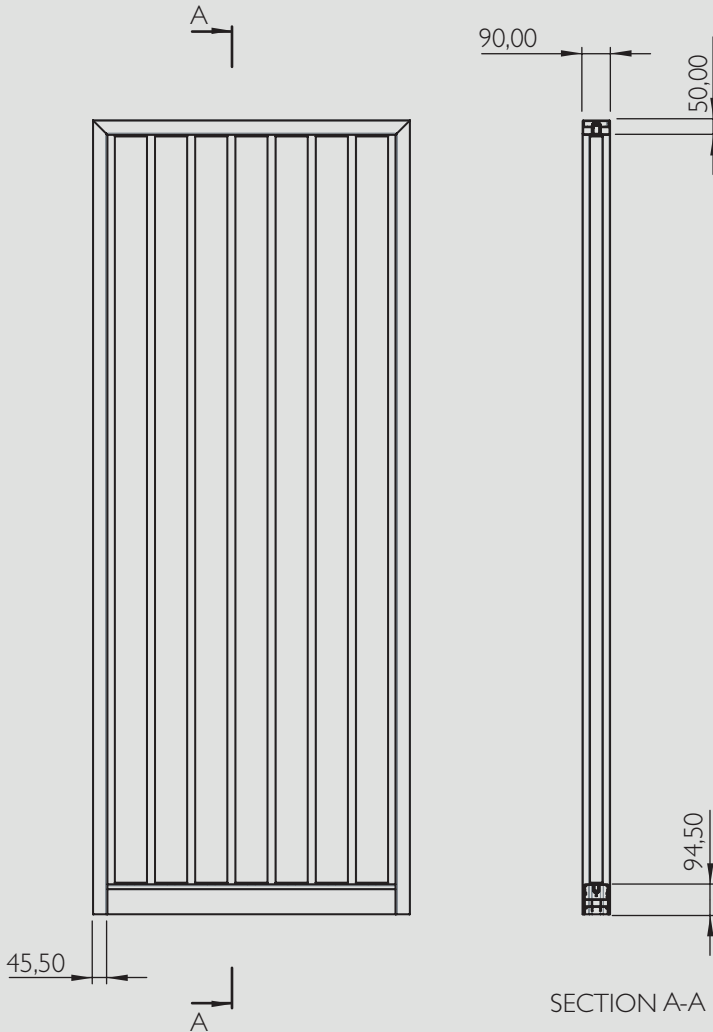

SECTION A-A

STRUCTURE: supporting structure in extruded aluminium on 4 sides.


SHADING: blade with min. 110 mm centre distance adjustable from 0° to 122°.

FIXING SHADING: perimeter fastening on predispositions.

PERPENDICULAR DIMMING: from 100% to 32% (at 110 mm pitch, depending on slats).

SIZE LIMITS: L MAX = 1500mm / H MAX = 6000mm (with stringers).







VARIANTS: from fully manual to fully automated.

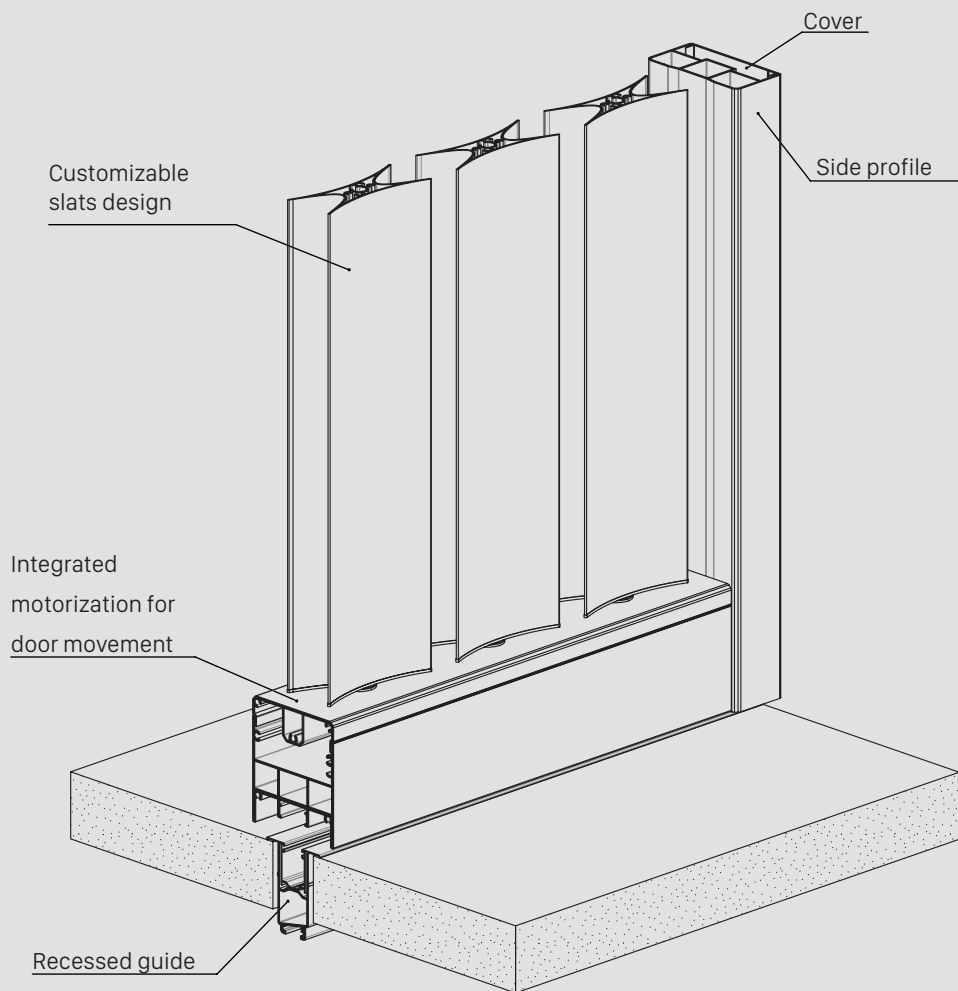


CERTIFICATIONS

up to 1400x3890mm:

- Wind load resistance according to UNI EN 1932:2013: Class 6 (3890Pa);



SLATS DESIGN: possibility to customize the blades' design, adapting the amount of light that can pass through.



Resistant



Thermal protection



Durable



Easy maintenance



Sun Shading

SMART SOLUTIONS FOR BUILDINGS

www.sunshading.it